

02/25/00  
JCT60 U.S. PTO

02-28-00

A

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (12/97)  
Approved for use through 09/30/00. OMB 0851-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.	SPL-22147181-00209	Total Pages	20
First Named Inventor or Application Identifier			
Keith E. Siders			
Express Mail Label No.	EK506617695US		

APPLICATION ELEMENTS  
See MPEP chapter 900 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 12]  
(preferred arrangement set forth below)
- Descriptive title of the invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D Invention
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 1]
4. ☒ Oath or Declaration [Total Pages 2]
- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))
- (for continuation/divisional with Box 17 completed)  
[Note Box 5 below]
- i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

## Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure ☐ Copies of IDS  
Statement (IDS)/PTO-1449 Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application, Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☒ Other Check for Patent Fees of \$768.00

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_/\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ New correspondence address below

NAME	Roger J. French				
ADDRESS	Jenkins & Gilchrist 1445 Ross Avenue, Suite 3200				
CITY	Dallas	STATE	TX	ZIP CODE	75202-2799
COUNTRY	USA	TELEPHONE	312 744-0090	FAX	214 855-4300

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box CPA, Washington, DC 20231.

PATENT

SPL-22/47181-00209

## APPLICATION FOR UNITED STATES LETTERS PATENT

for

## AGILE MODE FOR MODBUS NETWORK PROTOCOL

by


Keith E. Siders

## EXPRESS MAIL MAILING LABEL

NUMBER EK506617695US

DATE OF DEPOSIT 8/25/00

I hereby certify that this paper or fee is being deposited with the United States Postal Service "EXPRESS MAIL POST OFFICE TO ADDRESSEE" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington D.C. 20231.



Signature

## AGILE MODE FOR MODBUS NETWORK PROTOCOL

### BACKGROUND OF THE INVENTION

Modbus is a single master/multiple slave network communications protocol  
5 originally defined by Modicon for factory floor automation equipment. The master sends  
a query message frame addressed to a slave and, if the slave is present, the slave sends a  
response frame. The query/response interaction is called a transaction. Heretofore,  
Modbus system components have been set up to communicate either via ASCII character  
message frames or Remote Terminal Unit (RTU) binary message frames, but not both.  
10 Although a system is typically in the ASCII mode or the RTU mode during normal  
operation, it is cumbersome to change the mode of the system for troubleshooting  
purposes. While the RTU mode provides the best performance, troubleshooting via the  
RTU message frames can be more difficult, requiring proper software drivers loaded into  
a controller/computer to communicate via the RTU mode.

### SUMMARY OF THE INVENTION

A Modbus slave device is operable in an agile mode that allows the slave device to  
automatically interpret and respond to first-type and second-type message frames  
conveyed to the slave device by a master device. The slave device detects a first incoming  
20 character of a master query message frame generated by the master device. If the first  
incoming character is a prompt character for the first-type message frame, the slave  
device interprets the master query message frame as the first-type message frame. If the  
first incoming character is not the prompt character for the first-type message frame, the  
slave device interprets the master query message frame as the second-type message frame.  
25 If the slave device is addressed in the master query message frame, the slave device  
performs the command associated therewith and, if required by the command, generates a  
responsive message frame of the same type as the master query message frame.

### BRIEF DESCRIPTION OF THE DRAWINGS

30 The foregoing and other advantages of the invention will become apparent upon  
reading the following detailed description and upon reference to the drawing in which:

FIG. 1 depicts an electrical distribution panel of an energy management system including a control bus operable in an agile mode, in accordance with the present invention.

While the invention is susceptible to various modifications and alternative forms, specific embodiments have been shown by way of example in the drawings and will be described in detail herein. However, it should be understood that the invention is not intended to be limited to the particular forms disclosed. Rather, the invention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

#### DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENT

Implementing an agile mode interface allows a slave component in a system using a Modbus communications protocol to operate fluently in either an ASCII mode or an RTU mode on a transaction-by-transaction basis. While troubleshooting, however, the agile mode can be disabled, leaving the slave component fixed in either the ASCII mode or the RTU mode if desired. If the slave component is left in the ASCII mode, a technician can use a simple terminal, or terminal program, to communicate with the slave component without the use of special software drivers, thereby allowing a quick troubleshooting alternative. As explained above, communicating in the RTU mode requires proper software drivers.

In accordance with the present invention, the agile mode slave component detects the first incoming character of a query message from a master component. If the first character is the ASCII prompt character, a colon (:), then the message is interpreted as an ASCII query message. If the slave component is addressed in the ASCII query, the slave component performs the requested command and, if required (command dependent), the slave component will respond in the ASCII mode. If, however, the first character of the query message is not the ASCII prompt character (i.e., not a colon), then the message is interpreted as an RTU query message and all RTU frame timing and handling is applied. If the slave component is addressed in the RTU query, the slave component will send any required response in the RTU mode.

In one embodiment, a microprocessor of the slave component uses a pair of control bits (“Agile” bit and “ASCII” bit) for setting the mode of the slave component. The control bits are interpreted as follows:

Mode	Agile	ASCII
Fixed RTU	Off	Off
Fixed ASCII	Off	On
Agile RTU (default mode)	On	Off
Agile ASCII	On	On

If the slave component is in the fixed RTU mode in which the “agile” control bit is OFF and the “ASCII” control bit is OFF, the slave component can only interpret RTU message frames sent to it by the master component and cannot interpret ASCII message frames. If the slave component is in the fixed ASCII mode in which the “agile” control bit is OFF and the “ASCII” control bit is ON, the slave component can only interpret ASCII message frames sent to it by the master component and cannot interpret RTU message frames. As stated above, the fixed ASCII mode is advantageous while performing troubleshooting on the slave component. If the slave component is in the agile RTU mode in which the “agile” control bit is ON and the “ASCII” control bit is OFF, the slave component can interpret RTU message frames sent to it by the master component but will switch to the agile ASCII mode (turn “ASCII” control bit to ON) if the first incoming character of a master query is the ASCII prompt character. Due to the enhanced performance afforded by the RTU mode during normal operation of the slave component, the agile RTU mode is the default mode in one embodiment. The slave component, once in the Agile ASCII mode in which the “agile” control bit is ON and the “ASCII” control bit is ON, will only remain in said mode until the response frame is completed. Upon completion of the response frame, the slave component will return to the default mode, the Agile RTU mode in which the “agile” control bit is ON and the “ASCII” control bit is OFF, unless the command just received has placed the slave component in an aforementioned “fixed” mode.

The agile mode may be used in various systems employing Modbus network protocol, including for example energy management systems. FIG. 1 depicts an electrical

distribution panel 10 of an energy management system employing the agile mode. The basic components of the system include remotely-operable circuit breakers 12, a pair of "slave" control busses 14, a power module 16, and a "master" control module 18. These components plug into a panelboard 20 for ease of installation and operation.

The circuit breakers 12 perform both overcurrent protection and remote switching functions on AC voltage systems. They may have a 1-, 2-, or 3-pole construction. The 2- and 3-pole circuit breakers are common trip, i.e., an overcurrent condition on any given pole of the circuit breaker will cause all poles of the circuit breaker to open.

The control busses 14 provide a functional interconnect between the circuit breakers 12 and the control module 18. Specifically, they conduct 24VDC switching power and control signals from the control module 18 to switch individual circuit breakers 12, and report circuit breaker status back to the control module 18. Using surface mount technology, the busses 14 preferably include some intelligent switching circuitry. These "smart" busses 14 reside on panelboard interior mounting channels without fasteners.

Each bus 14 provides secure plug-in connectors for mounting a plurality of circuit breakers 12 and either the power module 16 or the control module 18. The power module 16 is mounted to one of the busses 14, while the control module 18 is mounted to the other of the busses 14 generally opposite to the power module 16. A bundle of wires 22 extend between the power module 16 and the control module 18 to allow these components to communicate with each other and to provide 24 VDC power from the power module.

The power module 16 contains a power supply that furnishes 24VDC power for remote circuit breakers for use in deriving regulated switching power, as well as 5VDC and other DC power for the control module system and smart bus electronics, and reports the status of the 24VDC to the control module 18 via one of the wires 22. The power module 16 plugs directly to a connector on one of the busses 14.

The microprocessor-based control module 18, which is plugged to a similar connector on the other bus 14, provides most of the intelligence of the electrical distribution panel 10. The control module 18 can process signals that originate externally from control devices, such as switches or sensors, or provide time-based control according to predefined daily schedules set up in the module. In addition, the control module 18 contains input and communications terminations for connecting to external

control devices. These terminations can accept a plurality of dry contact inputs with the following characteristics: 2-wire maintained, 2-wire momentary, and 3-wire momentary. The control module 18 provides optional network communications, multi-channel time clock functions, 365 day calendar control, and optional local display operations. If the control module 18 is provided with a local display, such a display may show system status and program information. The control module 18 may turn one or more of the circuit breakers 12 ON and OFF based on an event or events programmed into the control module. Events can be on automatic control, such as time-of-day, or signaled by an input change (e.g., moving a light switch from ON to OFF). Output signals are sent from the control module 18 to the circuit breakers 12 via the smart bus 14.

The power module 16 and control module 18 array reside in one panel 10, and yet be operatively coupled (e.g., by suitable cables) to other, remotely located similar panels to provide 24VDC and control functions to breakers mounted to a similar "smart" bus in the remotely located panel.

During normal operation of the energy management system 10, it is desirable for the "slave" control busses 14 (in the same panel 10, or in other panels) to be capable of receiving both ASCII and RTU message frames from the "master" control module 18. Therefore, during normal operation, a microprocessor within the control bus 14 sets the "agile" control bit to ON and the "ASCII" control bit to OFF to place the control bus 14 in the agile RTU mode. In the agile RTU mode, the control bus 14 can interpret RTU message frames sent to it by the control module 18. If the first incoming character of a master query from the control module 18 is the ASCII prompt character, a colon (:), then the "ASCII" control bit is turned ON to switch the control bus 14 to the agile ASCII mode and the message is interpreted as an ASCII query message. When the slave component has completed the ASCII response frame, then the "ASCII" control bit is turned OFF to switch the control bus 14 back to the agile RTU mode and the next message is assumed to be an RTU query message. The first incoming character of the next master query is then tested to determine if it is the ASCII prompt character and the correct mode is set accordingly. Because the agile mode control bus 14 operates on a transaction-by-transaction basis, it can handle an incoming ASCII message frame in agile ASCII mode, and turn around and handle the next message frame in agile RTU mode without requiring changes to any network control parameters in the control bus 14.

While the present invention has been described with reference to one or more particular embodiments, those skilled in the art will recognize that many changes may be made thereto without departing from the spirit and scope of the present invention. For example, the present invention is not limited to Modbus systems that communicate using either ASCII or RTU message frames. Rather, the present invention could be applied to Modbus systems containing master and slave devices that communicate using two types of message frames other than ASCII and/or RTU, where the first incoming character of the master query can be used to distinguish between the two types of message frames. Each of these embodiments and obvious variations thereof is contemplated as falling within the spirit and scope of the claimed invention, which is set forth in the following claims.

09513605.022500

**WHAT IS CLAIMED IS:**

1. A Modbus slave device operable in an agile mode, the slave device being capable of receiving, interpreting, and responding to first-type and second-type message frames, the slave device comprising:

5 means for detecting a master query message frame generated by a master device;  
and

means, responsive to a first incoming character of the master query message frame, for setting a message-type control bit to a first value if the first incoming character is a prompt character for the first-type message frame, and for setting the message-type  
10 control bit to a second value if the first incoming character is not the prompt character for the first-type message frame;

means for interpreting the master query message frame as the first-type message frame if the message-type control bit has the first value and as the second-type message frame if the message-type control bit has the second value;

15 means for performing a command associated with the master query message frame if the slave device is addressed in the master query message frame; and

means for generating a slave message frame responding to the master query message frame if the slave device is addressed in the master query message frame and the command requires a response, the slave message frame being of the first-type message  
20 frame if the message-type control bit has the first value, the slave message frame being of the second-type message frame if the message-type control bit has the second value.

2. The slave device of claim 1, wherein the first-type message frame includes ASCII characters and the second-type message frame includes RTU characters.

25

3. The slave device of claim 1, wherein the slave device is a control bus in an energy management system.

4. The slave device of claim 1, wherein the slave device is also operable in a  
30 fixed mode in which the slave device can interpret and respond with only one of the first-type and second-type message frames as determined by the message-type control bit, and further including means, including a mode-type control bit, for selecting one of the fixed

mode and the agile mode, the mode-type control bit being set to a first value to place the slave device in the fixed mode and being set to a second value to place the slave device in the agile mode.

5           5.       A Modbus slave device operable in an agile mode, the slave device comprising:

              means for detecting a first incoming character of a master query message frame generated by a master device; and

              means for interpreting the master query message as a first-type message frame if  
10   the first incoming character is a prompt character for the first-type message frame, and for interpreting the master query message as a second-type message frame if the first incoming character is not the prompt character for the first-type message frame.

              6.       The slave device of claim 5, wherein the first-type message frame includes  
15   ASCII characters and the second-type message frame includes RTU characters.

              7.       The slave device of claim 5, further including means for performing a command associated with the master query message frame if the slave device is addressed in the master query message frame.

20           8.       The slave device of claim 7, further including means for generating a slave message frame responding to the master query message frame if the slave device is addressed in the master query message frame and the command requires a response, the slave message frame being of the first-type message frame if the first incoming character is  
25   the prompt character for the first-type message frame, the slave message frame being of the second-type message frame if the first incoming character is not the prompt character for the first-type message frame.

              9.       The slave device of claim 5, wherein the slave device is a control bus in an  
30   energy management system.

10. A method of automatically interpreting first-type and second-type message frames conveyed to a Modbus slave device, the method comprising:

detecting a first incoming character of a master query message frame generated by a master device;

5 interpreting the master query message frame as the first-type message frame if the first incoming character is a prompt character for the first-type message frame; and

interpreting the master query message frame as the second-type message frame if the first incoming character is not the prompt character for the first-type message frame.

10 11. The method of claim 10, wherein the first-type message frame includes ASCII characters and the second-type message frame includes RTU characters.

12. The method of claim 10, further including performing a command associated with the master query message frame if the slave device is addressed in the  
15 master query message frame.

13. The method of claim 12, further including generating a slave message frame responding to the master query message frame if the slave device is addressed in the master query message frame and the command requires a response, the slave message  
20 frame being of the first-type message frame if the first incoming character is the prompt character for the first-type message frame, the slave message frame being of the second-type message frame if the first incoming character is not the prompt character for the first-type message frame.

25 14. A method of automatically interpreting first-type and second-type message frames conveyed to a Modbus slave device, the method comprising:

detecting a first incoming character of a master query message frame generated by a master device;

30 setting a message-type control bit to a first value if the first incoming character is a prompt character for the first-type message frame;

setting the message-type control bit to a second value if the first incoming character is not the prompt character for the first type of message frame

interpreting the master query message frame as the first-type message frame if the message-type control bit has the first value; and

interpreting the master query message frame as the second-type message frame if the message-type control bit has the second value.

5

15. The method of claim 14, wherein the first-type message frame includes ASCII characters and the second-type message frame includes RTU binary characters.

16. The method of claim 14, further including performing a command  
10 associated with the master query message frame if the slave device is addressed in the master query message frame.


17. The method of claim 16, further including generating a slave message  
15 frame responding to the master query message frame if the slave device is addressed in the master query message frame and the command requires a response, the slave message frame being of the first-type message frame if the message-type control bit has the first value, the slave message frame being of the second-type message frame if the message-type control bit has the second value.

20

**ABSTRACT**

A Modbus slave device is operable in an agile mode that allows the slave device to automatically interpret and respond to first-type and second-type message frames conveyed to the slave device by a master device. The slave device detects a first incoming character of a master query message frame generated by the master device. If the first incoming character is a prompt character for the first-type message frame, the slave device interprets the master query message frame as the first-type message frame. If the first incoming character is not the prompt character for the first-type message frame, the slave device interprets the master query message frame as the second-type message frame. If the slave device is addressed in the master query message frame, the slave device performs the command associated therewith and, if required by the command, generates a responsive slave message frame of the same type as the master query message frame.

09513605-022500

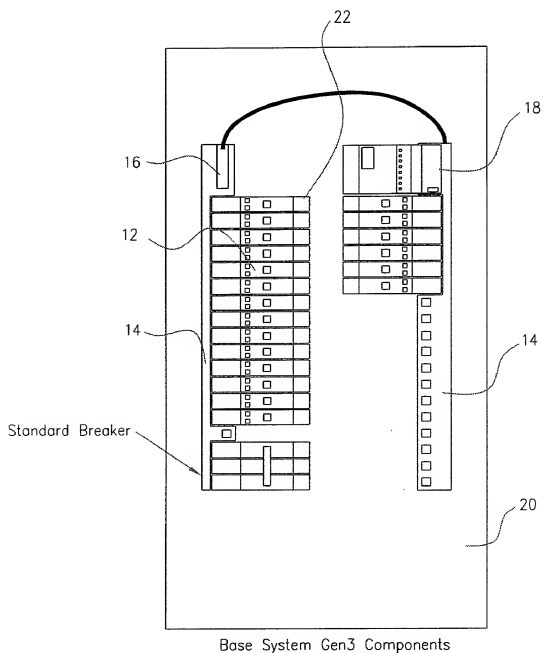

10

FIG. 1

As a below-named inventor, I hereby declare that:

(1) My residence, post office address and citizenship are as stated below next to my name.

(2) I am an original, first inventor and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled "**AGILE MODE FOR MODBUS NETWORK PROTOCOL**", Attorney Docket No. SPL-22/47181-00209, the specification of which:

  X   is attached hereto.

           was filed on                      as Application Serial No.                     .

(3) I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

(4) I acknowledge the duty to disclose all information known to me to be material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

(5) I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

			Priority Claimed
(Number)	(Country)	(Day/Month/Year Filed)	Yes or No
			Priority Claimed
(Number)	(Country)	(Day/Month/Year Filed)	Yes or No

(6) I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a), regarding events which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status)
(Application Serial No.)	(Filing Date)	(Status)

(7) I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Larry I. Golden, Registration No. 29,068  
Michael J. Femal, Registration No. 27,784  
David R. Stacey, Registration No. 33794  
Kareem M. Irfan, Registration No. 32,326  
Larry T. Shrout, Registration No. 35,357; all with Square D Co., and

Stephen G. Rudisill, Registration No. 20,087  
Michael J. Blankstein, Registration No. 37,097  
Roger J. French, Registration No. 27,786; all with the law firm of Jenkins & Gilchrist.

Direct all telephone calls to: Kareem M. Irfan - Telephone: 847-925-3455.  
Address all correspondence to: Larry I. Golden, Square D. Company, 1415 South Roselle Road,  
Palatine, IL 60067.

(8) I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name: Keith E. Siders  
(First) (Initial) (Last)

Inventor's Signature: \_\_\_\_\_

Date of Execution: \_\_\_\_\_

Residence: 1718 Oakway Circle, Columbia, TN 38401 USA  
(Include number, street name, city, state, and country)

Citizenship: U.S. Citizen

Post Office Address: \_\_\_\_\_  
(If different from Residence Address)